

14x12x07 UL Listed Fiberglass Reinf Polyester FRP
Weatherproof Outdoor IP66 NEMA 4 Enclosure, Gray



TEF141207

Features

- UL® Listed Molded Fiberglass Reinforced Polyester (FRP) industrial enclosure
- Stainless steel quick release latches with padlock hasps
- NEMA Type 4 / IP66 rated
- Fully gasketed raised lid & integral mounting flange
- One bag of MPS screws shipped loose inside each enclosure

Applications

- Remote wireless LAN WiFi equipment installations
- Rapid deployment of indoor and outdoor installations
- Protection of equipment from theft or damage
- Corrosive environments
- Hotspot
- Protection of equipment from theft or damage

Description

The TEF141207 enclosure is a rugged, roomy (14" x 12" x 7") weatherproof enclosure that is ideal for both indoor and outdoor applications. Constructed from molded fiberglass, it is well suited for high temperature or corrosive environments. The mounting flange allows it to be wall mounted as well as on a flat surface. The box can also be pole mounted with the optional pole mounting hardware kit.

The fully gasketed lid features a stainless steel continuous hinge and stainless steel quick release latches with padlock hasps. The enclosure material is UV stabilized and comes in machine tool gray. The TEF141207 is ideal for custom applications, which may require special modifications to the enclosure. Mounting stand-offs inside the enclosure can be used for mounting plates (TEF-PLATE01).

Now with UL® Listing Mark

The TEF141207 now comes with the UL® Listing Mark in every enclosure. Ideal for all constructions sites and equipment enclosure applications.

*Note: Enclosure ports (cable conduit connector and N-type holes for lightning protectors or connectors) must be properly sealed to maintain NEMA Type 4 / IP66 rating.

Size

Outer Height	15.5 in	[393.7 mm]
Outer Width	13.32 in	[338.33 mm]
Outer Depth	8.26 in	[209.8 mm]
Inner Height	14 in	[355.6 mm]
Inner Width	12 in	[304.8 mm]
Inner Depth	7.95 in	[201.93 mm]
Weight	9.95 lbs	[4.51 kg]
Enclosure Material and Plating	Fiberglass Reinforced Polyester (FRP)	

Environmental Specifications

Temperature Continuous	-50 to +150 deg C
NEMA Rating	4
Ingress Protection (IP) Rating	IP66

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[14x12x07 UL Listed Fiberglass Reinf Polyester FRP Weatherproof Outdoor IP66 NEMA 4 Enclosure, Gray TEF141207](#)

14x12x07 UL Listed Fiberglass Reinf Polyester FRP
Weatherproof Outdoor IP66 NEMA 4 Enclosure, Gray

TEF141207



Compliance Certifications

UL Listed

E211451

Transtector Systems specializes in protection of highly sensitive, low voltage equipment through its patented, non-degrading silicon diode technology and custom filters. Our power quality expertise translates into a diverse product offering including AC, DC, and signal applications as well as integrated cabinets, power distribution panels and EMP hardened devices.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [14x12x07 UL Listed Fiberglass Reinf Polyester FRP Weatherproof Outdoor IP66 NEMA 4 Enclosure, Gray TEF141207](https://www.transtector.com/14x12x07-ul-listed-fiberglass-reinf-polyester-frp-weatherproof-outdoor-ip66-nema-4-enclosure-gray-tef141207)

URL: <https://www.transtector.com/14x12x07-ul-listed-fiberglass-reinf-polyester-frp-tef141207-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Transtector reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Transtector does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Transtector does not assume any liability arising out of the use of any part or documentation.

14x12x07 UL Listed Fiberglass Reinf Polyester FRP Weatherproof Outdoor IP66 NEMA 4 Enclosure, Gray

TEF141207 CAD Drawing

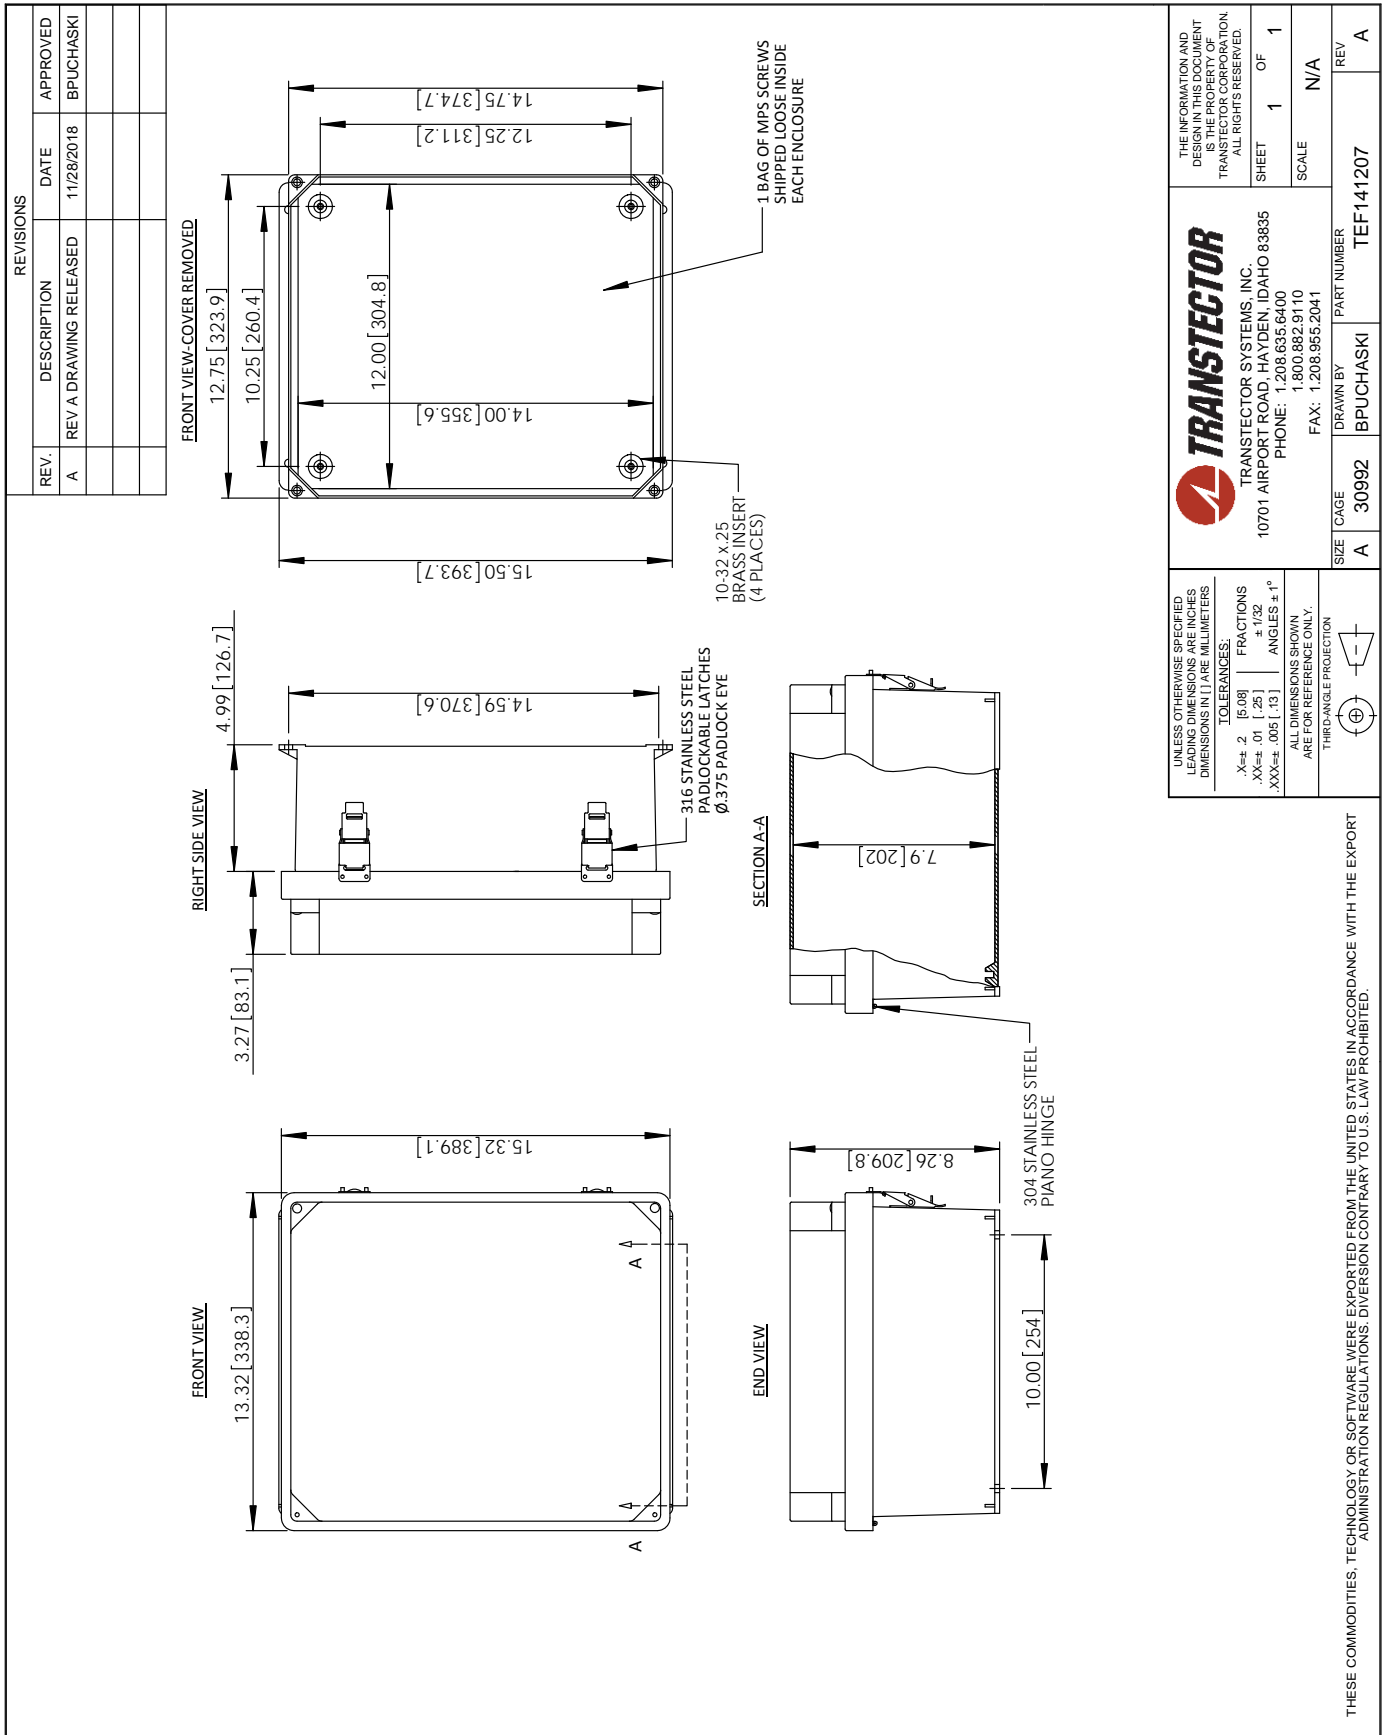

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REV A DRAWING RELEASED	11/28/2018	BPUCHASKI

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 .X±.2 [5.08] FRACTIONS ± 1/32
 .XX±.01 [25] ± 1/25
 .XXX±.005 [13] ANGLES ± 1°
 ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

TRANSTECTOR
 TRANSTECTOR SYSTEMS, INC.
 10701 AIRPORT ROAD, HAYDEN, IDAHO 83835
 PHONE: 1.208.635.6400
 FAX: 1.208.955.2041

SIZE: A CAGE: 30992 DRAWN BY: BPUCHASKI PART NUMBER: TEF141207 REV: A

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF TRANSTECTOR CORPORATION. ALL RIGHTS RESERVED.
 SHEET 1 OF 1
 SCALE N/A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.